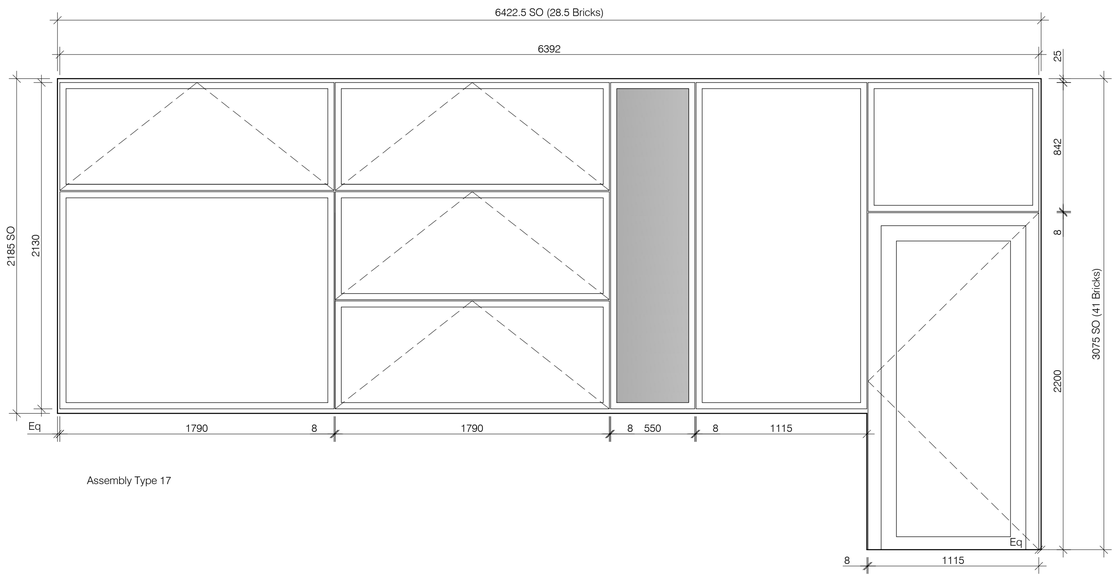

Assembly Type 17

This drawing to be read in conjunction with accompanying letter ref: 222586-2009-09-21-Construction-Issue

NOTES: Do not scale this drawing. All dimensions to be checked on site prior to commencement or manufacture.

Notes

1. All window assemblies will be composite/timber window assemblies. (L10/400)

2. Composite windows aluminium clad wood by VELFAC Ltd. Exterior frames are aluminium with polyester powder coated finish. Interior frames are softwood.

3. Where required areas of glazing to be glazed with a safety glass as defined in BS6206 and in accordance wit requirements NI of the Building Regulations. All areas of glazing are to satisfy requirements N2 and N3 of the Building Regulations.

AWAITING FOR VELFAC INFORMATION WINDOW/FRAME/TOLERANCES ARE NOT FINALISED AND ARE SUBJECT TO CHANGE

ISSUED FOR CONSTRUCTION

Rev	Date	By	Chk	Comment
A	21.09.09	AL	-	Issued for Construction

BRINGING IDEAS TO LIFE

FRANKHAM

Frankham Consultancy Group Limited
21 Perrymount Road
Haywards Heath RH16 3TP
t 01444 444900 f 01444 455642
enquire@frankham.com
www.frankham.com

Client

APOLLO EDUCATION

Project Title

Woodside
Inclusive Learning Campus

Drawing Title

Window Elevations
Block Y
(Sheet 4 of 4)

Drawn by:	Scale:	Date:
RKC	1:20@A1	Jul 09
Designed by:	Checked by:	Approved by:
FCG	CJ	AC

File Ref.: G:\2000\222586-WOODSIDE\BLOCK Y\ARCH\600_BIM_SCHEDULES\222586-AY-607-4.DWG - REV-A-14\24214424 14/04/09/14:46:24

Drawing No.	Rev.
222586-AY-607-4	A